

S-Corner PVC 90° I / A

Prefabricated PVC corners

Product Description	S-Corner PVC 90° I / A are made of premium-quality PVC by injection moulding procedure.
----------------------------	---

Uses	S-Corner PVC 90° I / A are used as prefabricated corners on Sikaplan® PVC and Sarnafil® G/S flat roof systems.
-------------	--

Characteristics / Advantages	<ul style="list-style-type: none">■ Outstanding resistance to weathering, including UV irradiation■ Ease of application■ Excellent weldability■ Recyclable
-------------------------------------	---

Tests

Approvals / Standards	■ Quality management system EN ISO 9001/14001
------------------------------	---

Product Data

Form

Appearance	Surface: smooth
-------------------	-----------------


Colour	Light grey (nearest RAL 7047) Slate grey (nearest RAL 7015) Traffic white (nearest RAL 9016) Other colours on request
---------------	--

Packaging	Bag with 10 pieces
------------------	--------------------


Storage

Storage Conditions	S-Corner PVC 90° I / A shall be stored in dry conditions.
---------------------------	---

Shelf-Life	S-Corner PVC 90° I / A does not expire during correct storage.
-------------------	--

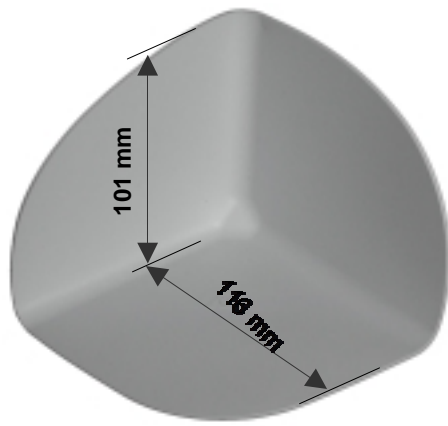

S-Corner PVC 90° I

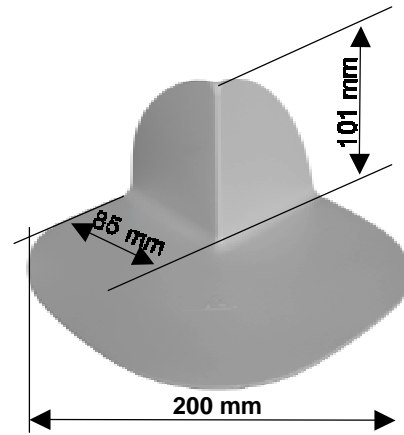

S-Corner PVC 90° A

Art. No.	Description	Colour	Uses	Material thickness
183648	S-Corner PVC 90° I	Light grey	Inside corner	1.5 mm
183698	S-Corner PVC 90° I	Slate grey	Inside corner	1.5 mm
183694	S-Corner PVC 90° I	Traffic white	Inside corner	1.5 mm
183646	S-Corner PVC 90° A	Light grey	Outside corner	1.5 mm
183700	S-Corner PVC 90° A	Slate grey	Outside corner	1.5 mm
183701	S-Corner PVC 90° A	Traffic white	Outside corner	1.5 mm

Technical Data

Material Basis Polyvinyl chloride (PVC)

System Information

System Structure Compatible products: all Sikaplan® PVC and Sarnafil® PVC flat roof waterproofing membranes

Application Conditions / Limits

Temperature The use of S-Corner PVC 90° I / A is limited to geographical locations with average monthly minimum temperatures of -50 °C. Permanent ambient temperature during use is limited to +50 °C.

Installation Instructions

Installation Method According to the valid installation instructions for Sarnafil® and Sikaplan® flat roofing membranes.

Notes on Installation / Limits Installation works to be carried out only by Sika instructed contractors for roofing. Temperature limits for the installation of the S-Corner PVC 90° I / A:
Substrate temperature: -30 °C min. / +60 °C max.
Ambient temperature: -20 °C min. / +60 °C max.
Installation of some ancillary products, e.g. contact adhesives / cleaners is limited to temperatures above +5 °C. Please observe information given by Product Data Sheets.
Special measures may be compulsory for installation below +5 °C ambient temperature due to safety requirements in accordance with national regulations.

Value Base All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

Local Restrictions Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

Ecology, Health and Safety Information The product does not fall within the EC-regulation of hazardous goods. As a result, a material safety data sheet following EC-Guideline 91/155 EWG is not needed to bring the product to the market, transport or use it. The product does not damage the environment when used as specified.

Protective Measures Fresh air ventilation must be ensured, when working (welding) in closed rooms. Local safety regulations must be observed.

Transportation Class The product is not classified as hazardous good for transport.

Disposal The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

Hälsa & Miljö

Hälsa & Miljö

Se separat säkerhetsdatablad.

Lagstiftning

Informationen och i synnerhet rekommendationerna avseende applikation och slutanvändning av Sika-produkterna lämnas i god tro baserat på Sikas nuvarande kunskap och erfarenhet av produkterna när dessa lagras, hanteras och används under normala förhållanden på ett korrekt sätt. I praktiken kan differenserna i material, underlag och den aktuella platsen variera på sådant sätt att ingen garanti vad gäller användbarhet eller lämplighet för ett visst ändamål kan lämnas. Med hänsyn härtill kan något rättsligt ansvar av vad slag det må vara varken härledas från denna information eller från någon skriftlig rekommendation eller i övrigt beträffande produkten lämnade råd. Hänsyn måste vid användningen även tas till tredje mans ägande och andra eventuella rättigheter. Alla order accepteras under förutsättningen av att Sikas aktuella försäljnings- och leveransbestämmelser är gällande. Användaren skall alltid använda sig av den senaste utgåvan av den aktuella produktens tekniska datablad, vilket kan erhållas vid förfrågan eller på hemsidan www.sika.se.



Sika Sverige AB
Domnarvsgatan 15
Box 8061
SE-163 08 Spånga
Sverige

Tel. +46 8 621 89 00
Fax +46 8 621 89 89
www.sika.se

