

## WATERPROOFING SIKA SOLUTIONS FOR CONCRETE BASEMENTS





### CONTENT

4	Sika Waterproofing Solutions
6	Basement Structures – Exposure and Stress
8	Owner's Project Requirements
9	Basement Waterproofing Concept and Strategy
10	Sika Waterproofing Solutions for Basements
12	Sika Waterproof Mortars and Bituminous Coatings
14	Sika White Box Concept and Watertight Concrete Systems
16	Liquid Applied Polymeric Membranes
18	Fully bonded Flexible Sheet Membranes
20	Compartmenzalized Membrane Systems with intergrated Controll and Incection back-up
22	Basement Waterproofing Systems – Overview and Selection Guide
24	Waterproofing Repair and Refurbishment Solutions

**26** Sika - The Global Leader in Structural Waterproofing

### WATERPROOFING SOLUTIONS

WATERPROOFING SYSTEMS for below ground structures are faced with more stringent requirements regarding durability, exposure and stress conditions, construction method and sequence, ease of application and total cost management. In addition, sustainable system solutions are becoming more important in order to save natural resources, energy and water, plus reduction of CO<sub>2</sub> etc. As the global leader in providing structural waterproofing solutions, Sika has the most complete and comprehensive range of products and systems that are designed and can be adapted to meet the specific needs and requirements of owners, architects, engineers and contractors on site.

**Basement or any below-ground structure** that is formed by a base slab, walls and a top slab, is partially or fully exposed to the surrounding soil and groundwater, resulting in specific exposure and stress from the prevailing permanent or temporary environmental conditions. Today new building owners generally request a service life of 50 years or more, and for structures such as tunnels up to 120 years. Any lack of watertightness severely reduces the long-term durability of a building or other below-ground structure and badly affect its planned use as water ingress will result in physical attack and deterioration of the concrete. This leads to expensive structural repair works, damage or loss of interior finishes and goods, operational downtime, or serious impact on the internal environment from damp and condensation.

The selection of the appropriate waterproofing method, the project specific design of the chosen waterproofing system and its correct installation on site are key elements in minimizing the Total Cost of Ownership. A waterproofing system typically amounts to less than 1% of the total core constructions cost, yet the selection of a high quality waterproofing solution can easily save this amount or more, in future maintenance and repair costs over the service life of the structure. Sika provides full range of technologies and systems used for below ground waterproofing. This includes highly flexible membrane systems, liquid applied polymeric membranes, watertight concrete admixtures, joint waterproofing systems, waterproofing mortars and coatings, as well as injection sealing grouts. All of these solutions are designed to be used together to meet the specific needs and requirements of owners, architects, engineers and contractors on site.

Sika's expertise is combined with more than 100 years of experience from all around the world, in providing successful waterproofing solutions for building basements and below ground civil engineering structures, such as tunnels and water retaining structures. Sika waterproofing experts are able to support our customers throughout their projects, from initially determining the best waterproofing concept, through detailed design and detailing, to on-site support for successful installation and completion. This also includes extensive remedial solutions for waterproofing existing structures.



#### RESIDENTIAL BUILDINGS

Basement waterproofing solutions for storage rooms, wellness and fitness areas or movie theatres in residential buildings.



#### COMMERCIAL OFFICE BUILDINGS

Basement waterproofing solutions for strong rooms, computer rooms or storage rooms in commercial office buildings.



#### ARCHIVES/LIBRARIES

Completely dry basement waterproofing solutions for humid sensitive archive rooms in libraries.



### UNDERGROUND PARKING

Basement waterproofing solutions for different grades of watertight underground parking areas.



#### METRO STATIONS

Specific waterproofing solutions for metro stations build in open-cut construction method.



#### SERVICE ROOMS

Basement waterproofing solutions for various plant rooms and underground power stations.




#### RETAIL UNITS AND WAREHOUSES

Complete dry waterproofing solutions to protect goods against humidity in retail units and warehouses.



#### LEISURE FACILITIES

Basement waterproofing solutions for below ground leisure facilities and indoor swimming pools and other sport rooms.

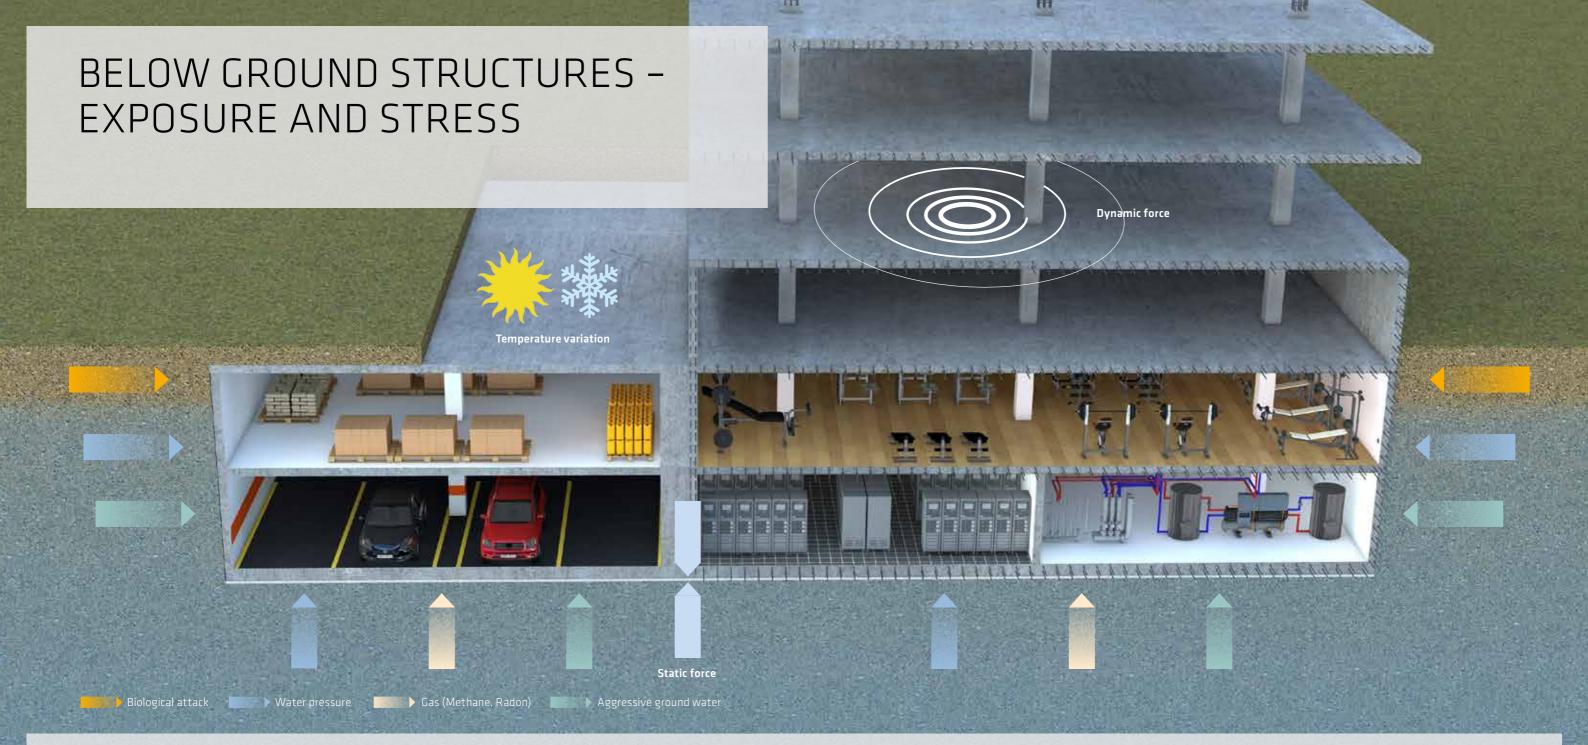

#### TYPE OF EXPOSURE AND STRESS

Below ground structures can be subject to many different exposure conditions including:

- Different levels of water exposure and pressure (e.g. damp soil, percolating water or water under hydrostatic pressure, and open water)
- Aggressive ground water containing chemicals (commonly sulphates and chlorides in solution)
- Unequal static forces (due to load, settlement, or uplift, etc.)
- Dynamic forces (e.g. from settlement, earthquake, explosion, etc.)
- Temperature variations (frost during the night/winter, heat during the day/summer)
- Gases in the ground (e.g. Methane and Radon)
- Aggressive biological influences (plant roots/growth, fungal or bacterial attack)

#### EXPOSURE IMPACT ON BELOW GROUND STRUCTURES

These different types of exposure may adversely influence the use, watertightness and durability of a basement structure, resulting in a reduced service life of the entire structure.

Exposure	Impact	on structure
Water ingress		e to structure, finishes, contents and the internal environment (condensation and mould etc.), loss of thermal insulation, corrosion of steel reinforcement
Aggressive chemicals	→ Concre	te damage (due to sulphate attack), corrosion of steel reinforcement (due to chloride attack)
Unequal static forces	→ Structu	ıral cracking
Dynamic forces	→ Structu	ıral cracking
Temperature variations	→ Conden	sation, scaling or cracking of concrete
Gas penetration	→ Gas per	netration and exposure for occupants
Fungal/bacterial attack	→ Damag	e to the waterproofing system, finishes or contents

## OWNER'S PROJECT REQUIREMENTS

To define the appropriate waterproofing strategy and type of system for a specific project, it is important to consider not only the ground conditions but also the project requirements of the owner: Functionality and future use, the service life and the total cost of ownership.

Owners requirements

Use, grade of watertightness)

Total Cost of Ownership (incl. maintenance cost)

### DEGREE OF WATERTIGHNESS REQUIRED

The future use defines the degree of watertightness and protection of a structure. The British standards describes in BS 8102-2009 different level of watertighness which can be combined with additional protection requirements.

#### **GRADE 1**

#### **Basic utility**

Some seepage and damp areas tolerable\*

\* Dependent on use



- Underground car parks
- Plant rooms
- Workshops

#### GRADE 2

#### Better utility

No water penetration, some damp areas tolerable\*, ventilation may be required

\* Dependent on use



- Underground car parks
- Storage areas
- Plant rooms
- Workshops

#### **GRADE 3**

#### Habitable

No water penetration acceptable, ventilation and dehumidification are

■ Restaurants and

commercial areas ■ Leisure facilities

#### ADDITIONAL REQUIREMENTS (FORMERLY GRADE 4)

#### As Grade 3 plus:


- No water vapour penetration
- Totally dry environment
- Protection against chemical
- Gas barrier



- Ventilated residential units ■ Residential areas and offices
  - Computer rooms
  - Archives
  - Special purpose facilities and areas

## SERVICE LIFE / DURABILITY

The required service life of individual concrete structure is mainly affected by water ingress and depends on the protection performance and longevity of selected waterproofing system. The graphic below shows the service life/durability of a structure depending on the grade of waterproofing system.

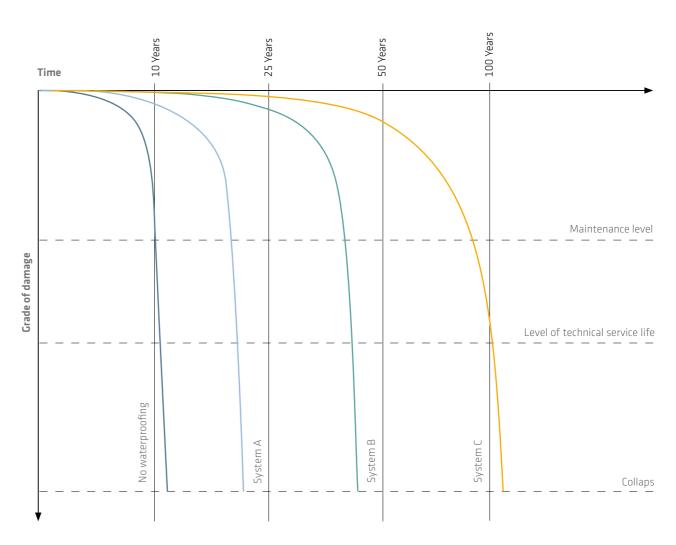

No Waterproofing: structure directly exposed to ground water without any waterproofing system.

System A: structure protected with low grade waterproofing system.

System B: Structure protected with a medium grade waterproofing system

System C: Structure protected with a high grade waterproofing system.

## OWNER'S PROJECT REQUIREMENTS


# BASEMENT WATERPROOFING – CONCEPT AND STRATEGY

3

#### TOTAL COST OF OWNERSHIP

The total cost of ownership (TCO) for the owner and investor includes all of the building costs for the entire service life of the structure, including the initial investment, the cost of any loss or damage to interior furnishings and goods etc. due to water ingress, the cost of any repair and maintenance, plus the cost of any downtime during any such works.

The graphic below illustrates the total cost of ownership for a specific project (e.g. typical commercial building) with a required service life of at least 50 years.

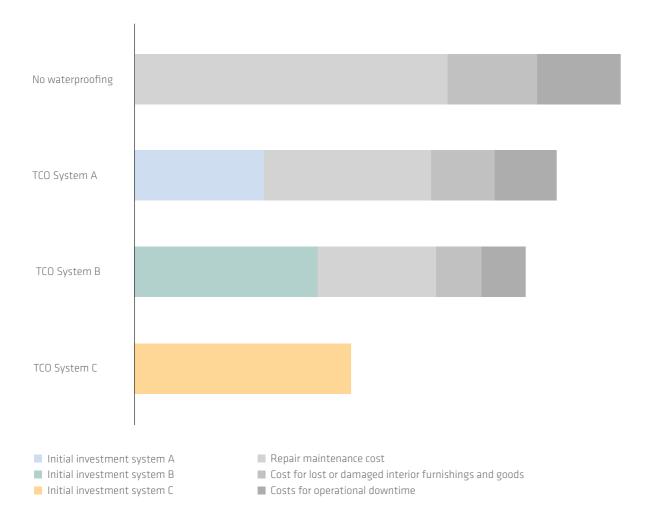


In general there are 3 different waterproofing concepts which can take all of the relevant project requirements into consideration:

#### INTEGRAL WATERPROOFING SYSTEM

A waterproofing system integrated into the concrete structure. Liquid water penetration is stopped by the structure itself and cannot entirely pass through into the basement. Typical products are admixtures for watertight concrete combined with appropriate joint sealing systems for connection, construction and movement joints.


- Grade of watertightness: Grades 1-3
- Application: New construction
- Protection provided: Waterproofing
- Durability: Very high durability (for non-agressive ground water)



#### EXTERNAL WATERPROOFING SYSTEM

A waterproofing barrier applied on the external surfaces that are exposed to ground water (possitive side). The structure is protected against water ingress and also against any aggressive substances or influences. For some materials such as post applied waterproofing mortars and coatings, access to the external surfaces is required for application after concreting.


- Grade of watertightness: Grades 1–3 plus additional requirements
- Application: New construction
- Protection provided: Waterproofing & concrete protection
- Durability: Low to high durability



#### INTERNALLY APPLIED WATERPROOFING SYSTEM

A waterproof barrier is applied on the internal surfaces of the structure (negative side). These systems do not prevent damage to the structure from water ingress, nor concrete damage due to aggressive chemicals. Generally these systems are applied as coatings or sheet membrane linings, and is only recommended for refurbishment works in example where access to the directly exposed surfaces is not possible.

- Grade of watertightness: Grades 1-3
- Application: Generally for refurbishment only
- Protection provided: Waterproofing
- Durability: limited durability (as the structure is unprotected)

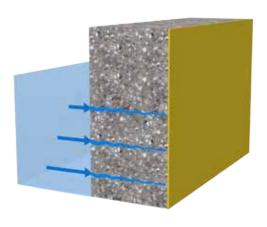

### WATERPROOFING TECHNOLOGIES



Waterproofing mortars and renderings



Sika White Box concept/Watertight concrete



Bitumen coatings and membranes



Liquid applied reactive membranes (PUR/PUA)




Fully bonded sheet membranes



Compartmentalized sheet membrane systems

The performance of each different waterproofing technology can generally be positioned as follows:

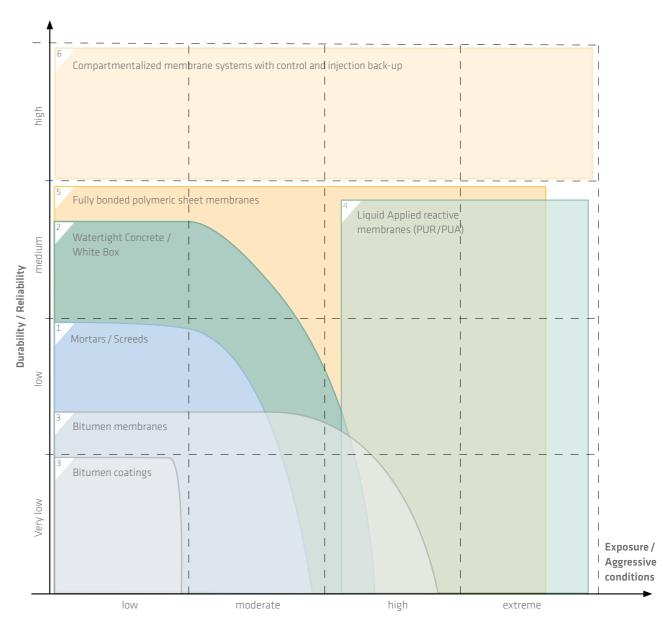

#### Durability / Reliability

Very low: <10 years/water ingress not really controlled. Low: 10 – 20 years/water ingress limited. Medium: 25 – 50 years/water ingress very limited. High: >50 years/water ingress complete under control.

#### Exposure / Aggressive conditions

Low: water pressure 0 – 5 m/no settlement, no aggressive ground

Moderate: water pressure 5 – 10 m/no aggressive ground water, cracks < 0.2 mm.

High: water pressure 10 – 20 m/aggressive ground water,

Extreme: water pressure >20 m/very aggressive ground water, earthquake, gas penetration.

# EXCAVATION AND CONSTRUCTION PROCEDURES

The type and depth of excavation and construction procedure also affects the selection and installation of the waterproofing system, e.g. for some externally applied waterproofing systems, working space is required. Therefore this has to be taken into consideration at an early stage of the design phase in order to plan sufficient excavation and any temporary works required such as shoring etc.. Waterproofing systems and their use with typical excavation requirements / construction methods are shown below.

#### OPEN CUT EXCAVATION

#### WITH SLOPING SIDES

#### Description:

This basic excavation method using sloping sides allows an easy bottom-up construction method and has no impact on the selection or installation of the waterproofing system.


#### Waterproofing systems:

Integral waterproofing systems:

■ Sika White Box / Watertight Concrete System

Externally applied waterproofing systems:

- Compartmentalized membrane systems
- Pre- and post-applied fully bonded sheet membranes
- Liquid applied membranes
- Waterproofing mortars and coatings (in combination with drainage systems)

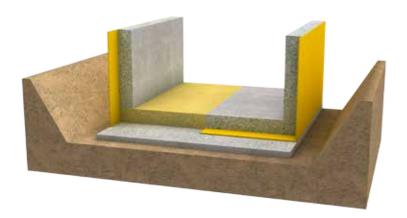

#### WITH RETAINING WALLS

#### **Description:**

Open cut excavation using temporary shoring/ retaining walls does not influence the selection or installation of the waterproofing system when enough space (>1.0 m) can be provided between the retaining wall and the structure.


#### Waterproofing systems:

Integral waterproofing systems:

lacktriangle Sika White Box / Watertight Concrete System

Externally applied waterproofing systems:

- Compartmentalized membrane systems
- Pre- and post-applied fully bonded sheet membranes
- Liquid applied membranes
- Waterproofing mortars and coatings (in combination with drainage systems)

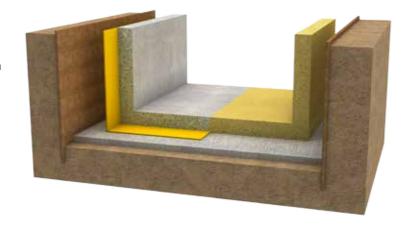

#### CONSTRUCTION WITH PILED / DIAPHRAGM WALLS

#### **CONSTRUCTION INSIDE PILE WALLS**

#### Description:

Pile walls or diaphragm walls limit the selection of the waterproofing system due to limited space and access. This is because the structure is normally built directly against this wall. Post- and externally applied, bonded waterproofing systems can therefore not be used for these structures.

#### Waterproofing systems:

Integral waterproofing systems:

■ Sika White Box / Watertight Concrete System

Externally applied waterproofing systems (base slab):

- Compartmentalized membrane systems
- Pre-applied fully bonded sheet membranes



#### PILE WALLS FORMING PART OF THE STRUCTURE

#### Description:

This method can be used for bottom-up as well as top-down con- struction. Unlike other methods, diaphragm walls are also used to form part of the new structure. Waterproofing of the connections and intersections between base slab / walls are key. Externally applied waterproofing can only be used below the base slab.

#### Waterproofing systems:

 $Integral\ waterproofing\ systems:$ 


■ Sika White Box / Watertight Concrete System

Externally applied waterproofing systems (base slab):

- Compartmentalized membrane systems
- Pre-applied fully bonded sheet membranes



## SIKA WATERPROOF MORTARS AND BITUMINOUS COATINGS

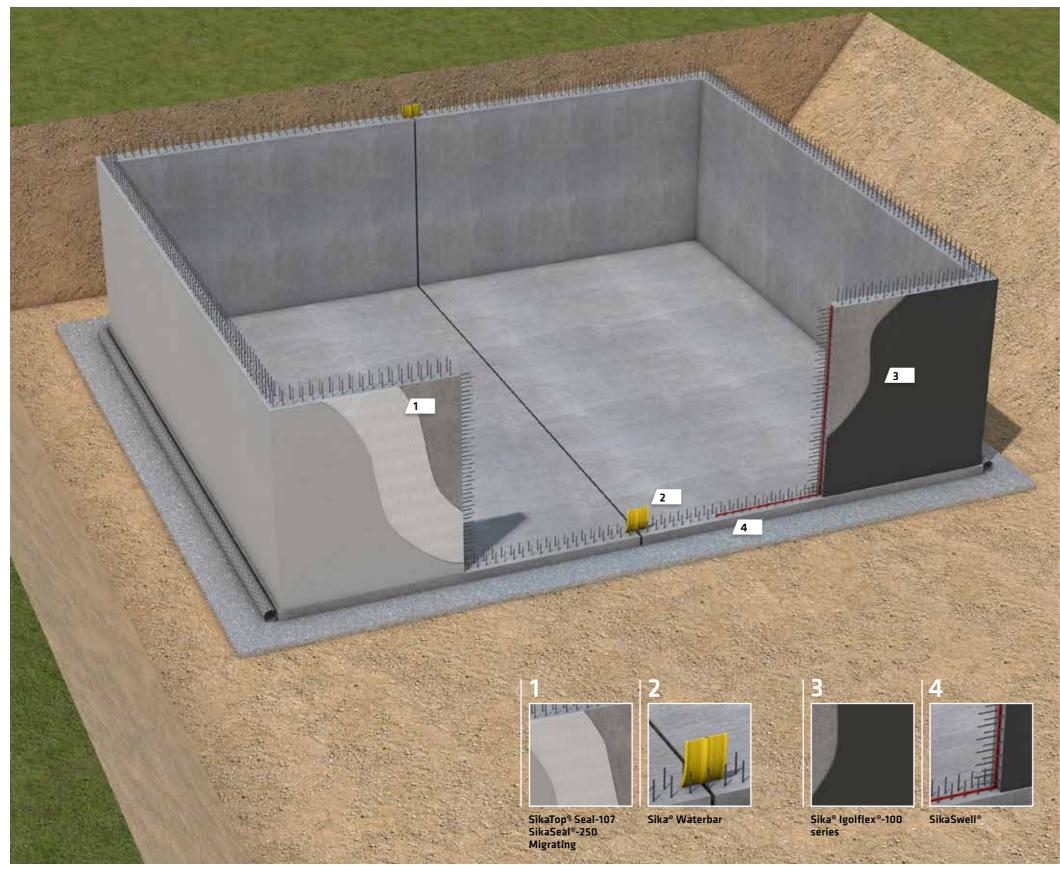

#### EXTERNALLY APPLIED SYSTEMS WITH OR WITH-OUT CRACK-BRIDGING ABILITIES

Sika waterproof mortars and bitumen based coatings are rigid or semi-flexible water-proofing products. They are supplied as ready to use solutions for many basements to seal against damp soil, seepage and percolating water. They must be pre-applied on suitable substrates under new structural concrete slabs and are generally post-applied externally on new walls. They must be used in combination with appropriate joint waterproofing systems for the connection, construction and movement joints. Good external drainage with a permanent dewatering system is also necessary; normally using drainage pipes placed at or below the level of the base slabs to prevent any build-up of water pressure.

#### USE

- As a waterproofing system for Grades 1 to 2
- To protect structures against percolating water
- For limited ground conditions (no settlement, less aggressive environments, low water pressure)

#### MAIN ADVANTAGE


- Cost efficient solution (Material + Application)
- Ready to use & easy to apply
- Provide additional concrete protection

#### TYPICAL PROJECTS

- Domestic applica-
- Residential buildingsIndustrial buildings

SikaTop® Seal-107	2-component, polymer modified, rigid cementitious water- proofing mortar, internally and externally applied for full sur- face waterproofing and tanking.	
SikaSeal®-250 Migrating	1-component, rigid and cement based active crystalline waterproofing slurry for internal and external applications on concrete.	
Sika® Igolflex®-100 series	One component, rigid, solvent-free, polystyrene-filled bitumen based coatings for use against water ingress and in contact with ground water (positive water pressure side).	
Sika® Igolflex®-200 series	Two component, flexible, solvent-free, fibre-filled bitumen based coatings, for use against water ingress and in contact with ground water (positive water pressure side).	
Complementary products for joint sealing and waterproofing:		
Sika® Waterbars	Internally or externally applied joint waterstops, based on PVC or TPO, for sealing construction and movement joints.	
SikaSwell® Sealants and Profiles	Range of hydrophilic profiles and gun applied sealants, designed for the sealing and waterproofing of construction joints and penetrations (e.g. pipe entries).	

# SIKA WHITE BOX CONCEPT AND WATERTIGHT CONCRETE SYSTEMS

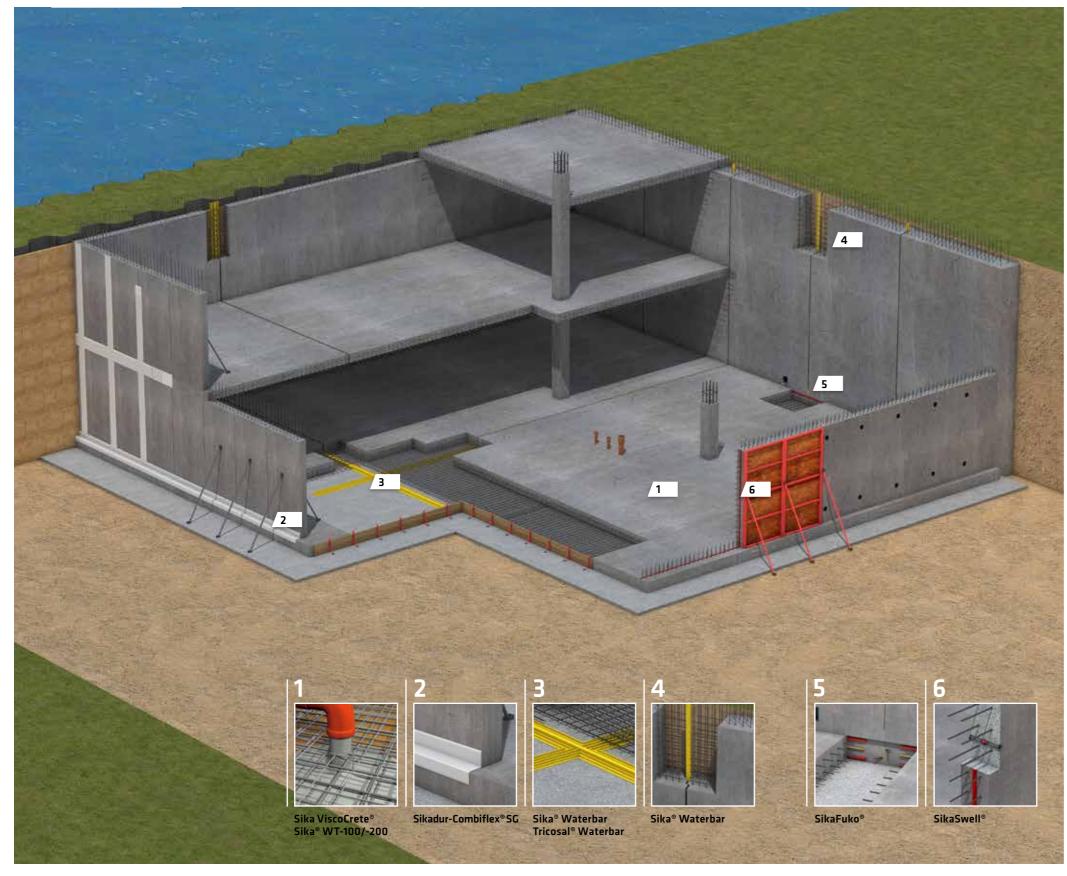

#### INTEGRAL, RIGID AND COST EFFICIENT SYSTEMS

The "Sika White Box Concept" involves optimum structural design and reinforcement together with an integral rigid waterproofing solution. This consists of a waterproof concrete combined with appropriate joint sealing systems for any necessary construction and movement joints. To produce watertight concrete that is impermeable to water, special admixtures including superplasticizers and pore-blocking or active crystalline agents have to be used, in order to also ensure optimum consistence, flow and ease of compaction in a dense matrix with minimal voids. For sealing the joints, many different Sika solutions can be used including hydrophilic sealants / profiles, waterbars in various material qualities, injection hoses or sealing tapes, dependent on the type and location of the joint and its requirements.

#### USE

- As the waterproofing solution for Grades 1 3
- For non-moving structures and less aggressive environments (without additional concrete protection)

#### MAIN ADVANTAGE


- Cost effective solution (Material + Application)Very durable waterproo-
- fing system
  Reduced working procedures on site

#### TYPICAL PROJECTS

- Underground car parks
- Commercial developments
- Residential buildings
- Industrial facilities

SikaPlast® / Sika ViscoCrete®	Mid and High Range Water Reducing admixtures for reducing pore volumes and improving rheology for consistence.
Sika® WT-100 /-200	Pore-blocking and active crystalline admixtures to block pore against water penetration.
Sika® Control	Shrinkage reducing admixture to limit crack formation throughout the hardening phase.
Sikafume® range	Additives based on pozzolanic silica fume that is used to reduce the hardened pore volume of the concrete.
Sika® Waterbars	Internal or external applied waterstops based on PVC or TPO for construction and movement joints.
SikaSwell® Sealants and Profiles	Range of hydrophilic profiles and gun applied sealants, designed for the sealing and waterproofing of construction join and penetrations (e.g. pipe entries).
SikaFuko® Injection Hoses	Injection hoses for construction joints that can be used for sealing by injection and re-injection in the event of future movement etc.
Sikadur-Combiflex® SG System	High performance, over-banding sealing tape system for possealing and waterproofing of construction and movement joints.
Tricosal® Waterbars	Internal and external applied waterstops and flanging syster based on rubber for heavy duty joint waterproofing.

## LIQUID APPLIED, REACTIVE POLYMERIC MEMBRANES

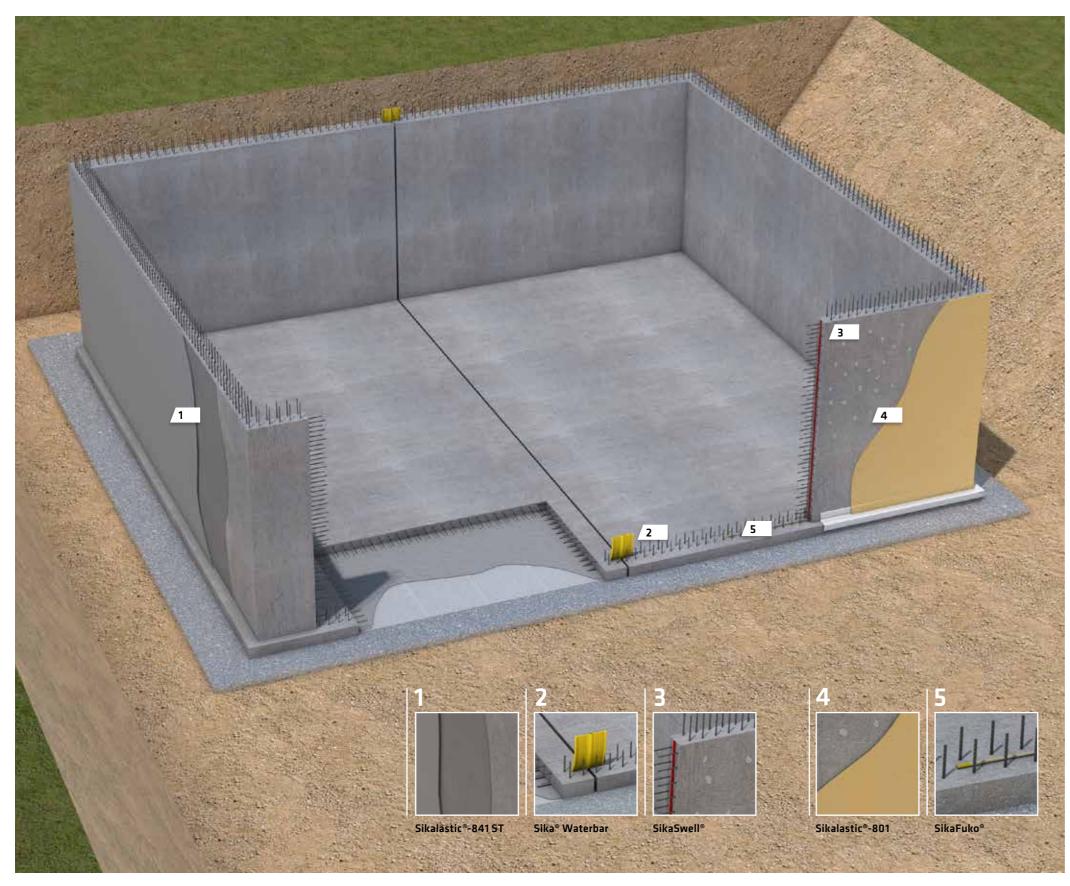

### FAST TO APPLY, CRACK-BRIDGING, POLYURETHANE AND POLYUREA BASED LIQUID MEMBRANES

Sika liquid applied membranes (LAM) are highly elastic and flexible polymeric systems, usually based on polyurethane resins or polyurea resins with excellent technical properties for high performance applications. These materials are applied on prepared / primed external concrete surfaces by hand or spray and they can provide excellent solutions for complex detailing.

Liquid applied membranes will also prevent any lateral water underflow in the event of local damage. Application below the base slab is done on a special fleece before the structural concrete slab is placed.

- As the waterproofing solution for Grades 1 - 3+
- as chlorides, sulphates or biological attack

#### MAIN ADVANTAGE


- ability
- For additional protection to concrete structures against aggressive influences such
- High crack-bridging
- High chemical and abrasion resistance ■ Easy to apply, especially around complex details

#### TYPICAL PROJECTS

- Underground car parks ■ Commercial develop-
- Residential buildings
  - Industrial facilities
  - Civil engineering structures (e.g. open-cut tunnels)

Sikalastic®-801 /-801 SL	Highly flexible, 1-component polyurethane based liquid applied membranes for vertical (801) and horizontal (801 SL) areas.
Sikalastic®-841 ST	Highly flexible, very fast curing, pure polyurea based, liquid applied membranes with very good chemical resistance for both, vertical and horizontal areas.
Complementary products	for Joint Sealing and Waterproofing:
Sika® Waterbar	Externally fixed, cast-in-place waterstops based on PVC or FPC for sealing and waterproofing construction and movement joints.
SikaFuko® Injection hoses	Injection hoses for construction joints and other details, with or without swelling strips, which can be used for sealing by injection and re-injection in the event of future movement etc.
SikaSwell® Sealants and Profiles	Range of hydrophilic profiles and gun applied sealants, designed for the sealing and waterproofing of construction joint and penetrations (e.g. pipe entries).
Sikadur-Combiflex® SG System	High performance, over-banding sealing tape system for post- sealing and waterproofing of construction and movement joints.

# FULLY BONDED FLEXIBLE SHEET MEMBRANE SYSTEMS

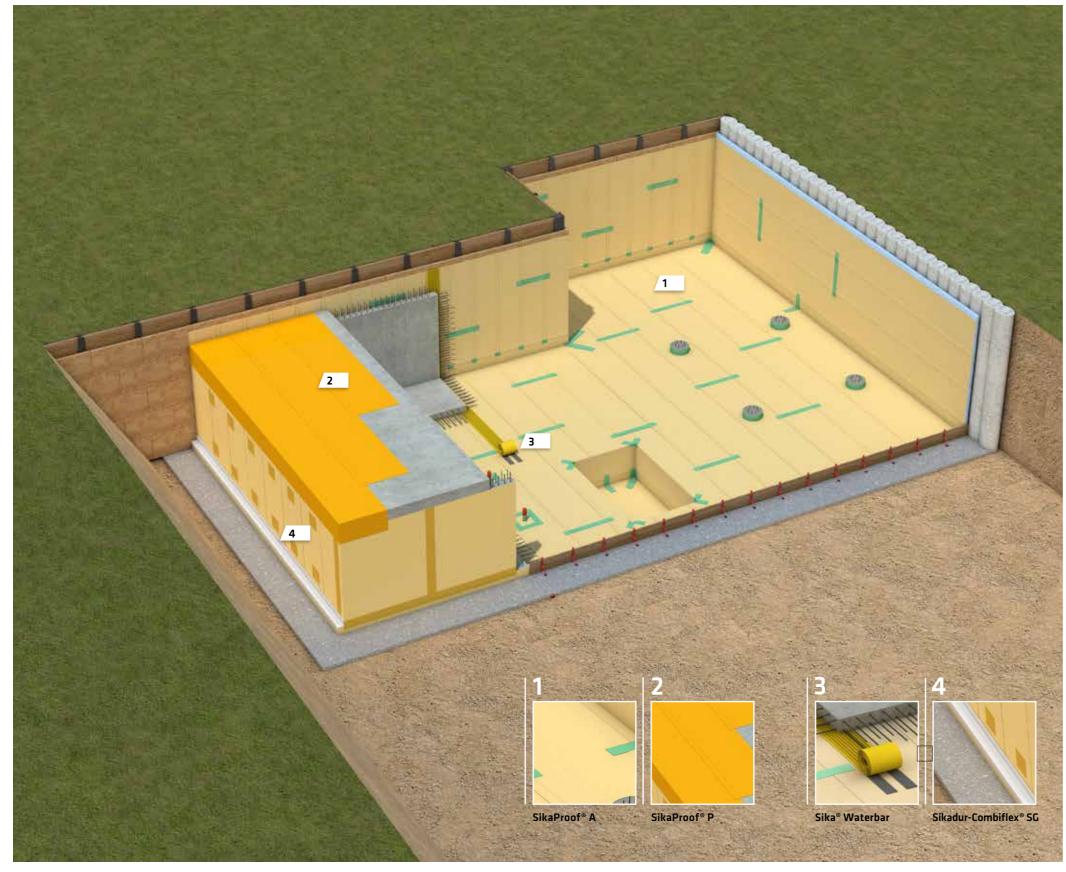

## SIKA'S UNIQUE, PRE-APPLIED, FULLY BONDED AND CRACK-BRIDGING MEMBRANE SYSTEM

SikaProof®, the fully bonded and highly flexible FPO sheet waterproofing membrane systems can permanently prevent any lateral water underflow between the water-proofing and the structural concrete in the event of local damage, even when this has occurred below the base slab.

The SikaProof® fully bonded sheet waterproofing membrane systems are simple and easy to use, making them fast and secure to install on site. The overlaps, butt joints and details are all connected and sealed very simply by bonding them together with sealing tapes or self-adhered strips. There are no complicated welding procedures and no special equipment is required on site.

#### USE

- As the waterproofing solution for Grades 1 3+
- For aggressive ground conditions (ground water and soil, Radon gas etc.)

#### MAIN ADVANTAGE

- Cost effective solution (Material + Application)High durability
- No lateral water
- underflow


  High flexibility and crackbridging ability
  - Approved detailings

#### TYPICAL PROJECTS

- All types of concrete basements (residential, commercial etc.)
- Industrial facilities
- Pre-cast structures

SikaProof® A	Pre- and cold applied sheet waterproofing membrane system for application below base slabs, plus on single and double-faced formwork cast walls.
SikaProof® P	Post-applied sheet waterproofing membrane system, specially designed for roof slabs and double-faced formwork cast walls.
Complementary products	for joint sealing and waterproofing:
Sika® Waterbar	Externally fixed, cast-in-place waterstops based on PVC or TPC for sealing and waterproofing construction and movement joints.
Sikadur-Combiflex® SG System	Over-banding sealing tape system for post-sealing and waterproofing of construction and movement joints, around penetrations and for connections.
SikaSwell® Sealants and Profiles	Range of hydrophilic profiles and gun applied sealants, designed for sealing and waterproofing of construction joints and penetrations.(e.g. pipe entries).
SikaFuko® Injection hoses	Injection hoses for construction joints and other details, with or without swelling strips, which can be used for sealing by injection and re-injection in the event of future movement etc

## COMPARTMENTALIZED MEMBRANE SYSTEMS WITH INTEGRATED CONTROL AND INJECTION BACK-UP

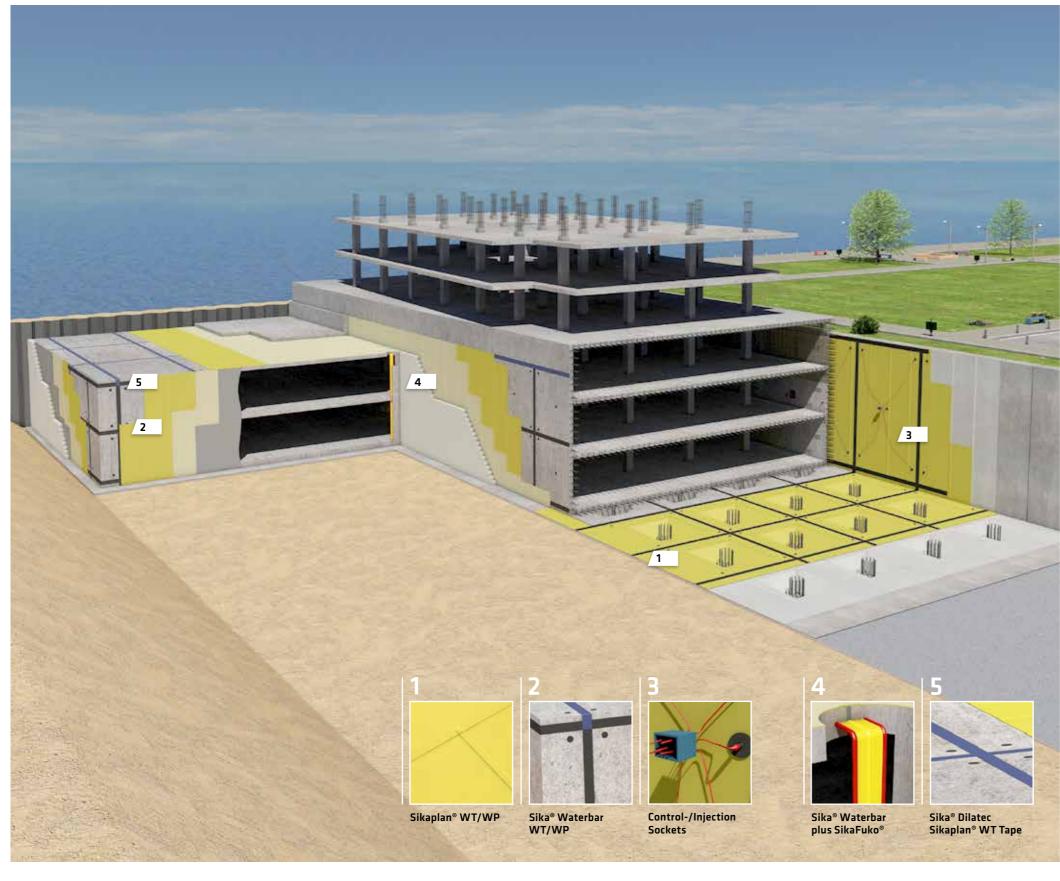

#### HIGH PERFORMANCE. CRACK-BRIDGING AND **FULLY CONTROLLED**

Highly flexible waterproofing systems using Sikaplan PVC based or FPO based sheet waterproofing membranes are installed externally and cover the entire basement structure in contact with the ground. The waterproofing layer is divided into 'compartments' with a network of cast in place compatible waterstops that are welded to the membrane. This allows very significant reduction of risk as in the event of any leaks (i.e. from damage to the membrane), the position of the leak is easy to locate by the control and injection sockets and remedial action (i.e. injection) can be taken to ensure continued watertightness and concrete protection of the system at any time during its service life.

- As waterproofing solutions for Grades 1 - 3+
- For high demands and harsh ground conditions
- Protection against radon or methane gas
- For structures in aggressive groundwater like coastal areas

#### Main Advantage

- trolled and secured at any time
- Easily repaired in case of leaks due to direct
- concrete

#### **Typical Projects**

- Watertightness is con-
- Highly crack bridging
- access of compartment
- Secure full protection of
- Public etc.) ■ Industrial facilities ■ Containment areas

■ Underground car parks

residential. commercial.

■ All types of buildings

■ Civil engineering structures (e.g. Metro stations)


Sikaplan® WP 1100 series	Homogeneous and plasticized PVC sheet waterproofing membranes and gas-tight barriers for general use, loose laid with the membrane overlaps connected by heat welding.
Sikaplan® WT 1200 series	FPO sheet waterproofing membranes and gas-tight barriers for use against aggressive groundwater, loose laid with the membrane overlaps connected by heat welding.
Sika® Waterbar WP/WT	Cast-in-place external waterstops, based on PVC or FPO, connected with similar based sheet waterproofing membranes by heat welding, for compartmentalized waterproofing systems.
Control- and Injection Sockets	Preformed pieces based on PVC or FPO, connected with flexible injection pipes to allow access to compartments for the control of watertightness and injection in the event of leaks.
Complementary sealing sy	stem solutions:
Sikaplan® WT Tape 200	Adhesive sealing tape based on FPO, compatible with Sikaplar WT sheet membranes for waterproofing the terminations of post-applied compartment systems.
Sika® Dilatec E/ER	Adhesive sealing tapes based on plasticized PVC, compatible to Sikaplan WP sheet membranes for water proofing terminations of post applied compartment systems.

# BASEMENT WATERPROOFING SOLUTIONS

An overview and selection guide for new constructions

	SikaTop° / SikaSeal° / Sika° Igolflex°	Sika White Box	Sikalastic <sup>°</sup>	SikaProof°	Sikaplan°
Technology / Type of system	Mortars & Coatings	Watertight Concrete	Liquid Applied Membranes	Fully bonded Sheet Membrane	Compartmentalized Membrane System with integrated control- and Injection back-up
Waterproofing Concept / Strategy	Externally applied	Integral	Externally applied	Externally applied	Externally applied
Grade of watertightness	Grades 1–2	Grades 1–3	Grades 1–3 plus additional requirements	Grades 1–3 plus additional requirements	Grades 1–3 plus additional requirements
Concrete protection	Limited	Low	Very high	High	Very high
Water resistance level	■ Seepage / percolating water ■ Rising capillary water	<ul> <li>High hydrostatic pressure</li> <li>Seepage / percolating water</li> <li>Rising capillary water</li> </ul>	<ul><li>Medium hydrostatic pressure</li><li>Seepage / percolating water</li><li>Rising capillary water</li></ul>	<ul><li>High hydrostatic pressure</li><li>Seepage / percolating water</li><li>Rising capillary water</li></ul>	<ul> <li>Very high hydrostatic pressure</li> <li>Seepage / percolating water</li> <li>Rising capillary water</li> </ul>
Performance characteristics	Crack-bridging: n.a.  Water vapour tighness: +  Chemical resistance: +  Gas barrier: +  Durability: +	Crack-bridging: n.a. Water vapour tighness: + Chemical resistance: + Gas barrier: + Durability: +++	Crack-bridging: ++  Water vapour tighness: +++  Chemical resistance: ++  Gas barrier: ++  Durability: +	Crack-bridging: ++  Water vapour tighness: ++  Chemical resistance: ++  Gas barrier: ++  Durability: ++	Crack-bridging: +++ Water vapour tighness: +++ Chemical resistance: +++ Gas barrier: +++ Durability: +++
Safety level / Reliability	Low	Low to medium	Medium	Medium to high	Very high
Excavation method	Only open excavation	Open excavation and piled walls	Only open excavation	Open excavation and piled walls	Open excavation and piled walls
Repair in the event of leaks	By crack or area injection	By local injection of limited areas.  Damage is easy to locate	By crack injection	By crack injection	By injection of leaking compartments trough integrated back-up system. Easy to control and locate due to control sockets or active control system. Re-injection possible.
Conditions of application	<ul> <li>Controlled conditions required (temperature, water, humidity)</li> <li>Substrate preparation required</li> </ul>	<ul> <li>Limited to suitable temperatures for concreting works.</li> <li>No substrate preparation required</li> </ul>	<ul> <li>Controlled conditions required (temperature, water, humidity)</li> <li>Substrate preparation required</li> </ul>	<ul> <li>Controlled conditions required (temperature, water, humidity).</li> <li>Substrate preparation required</li> <li>Membrane must be protected until the reinforced concrete is placed</li> </ul>	■ Substrate preparation required
Advantages	■ Very cost effective ■ Simple & fast to apply	<ul> <li>Very cost effective</li> <li>No protection required (walls)</li> <li>Simple &amp; fast construction</li> <li>High durability</li> </ul>	<ul><li>High performance</li><li>Easy detailing solutions</li><li>High durability</li></ul>	<ul> <li>Highly efficient</li> <li>High performance</li> <li>Easy to apply</li> <li>Low risk</li> <li>High durability</li> </ul>	<ul> <li>High waterproofing security</li> <li>Very high performance</li> <li>Simple and fast to repair</li> <li>High durability / reliability</li> <li>Integrated system redundancy</li> </ul>

# REPAIR AND REFURBISHMENT SOLUTIONS

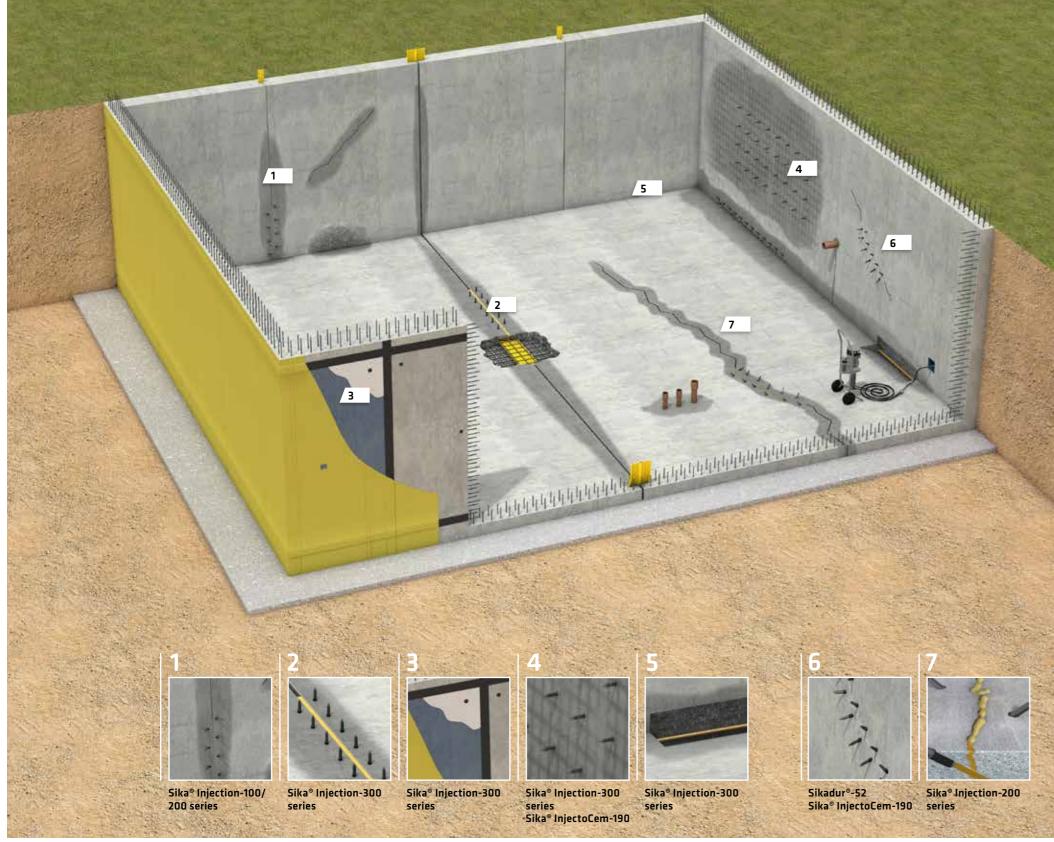

## SIKA INJECTION SOLUTIONS FOR REPAIR AND REFURBISHMENT WORKS

In situations with water ingress due to localised damage of the waterproofing system, appropriate repairs to seal the leaking areas have to be undertaken. These can often only be done by injection, because of inadequate access to the waterproofing system itself in most basements and below ground structures.

According to the type of damage / leakage (i.e. through joints, cracks or honey-combed areas, etc.) and the waterproofing requirements, the right materials have to be used. Successful and durable repairs by injection are ensured by the combination of Sika's expert diagnosis, using Sika materials and recommended equipment, plus Sika trained installers.

#### USE

Sealing and repairing of:

- Cracks
- All types of joints
- Sikaplan compartmentsSealing of leaking areas

by curtain injections

### MAIN ADVANTAGE ■ No excavation

- necessary
   Localised repair
- ts works
  as Durable repairs

#### TYPICAL PROJECTS

 Suitable for all types of basements and civil engineering projects including structural waterproofing

т.		
	Sika® Injection-100 series	Flexible, solvent-free, fast foaming polyurethane (PUR) foam for temporary water-stopping of high water intrusions through cracks, joints and cavities in concrete.
	Sika® Injection-200 series	Elastic, solvent-free PUR-Injection resin for permanent sealin of dry, damp or water-bearing cracks and joints in concrete.
	Sika® Injection-300 series	Elastic, very low viscosity polyacrylic injection resin for perminent sealing of water-bearing cracks, voids and joints in concrete. It is also used for the repair of damaged waterproofing membrane compartments and injection of SikaFuko injectio hoses.
	Sika® Injection-400 series Sikadur®-52	High-strength, solvent-free, low viscosity epoxy resin for structural bonding and sealing of cracks, including in damp conditions.
	Sika® InjectoCem-190	2-component, cement based injection material with corrosic inhibitors for the sealing and strengthening of cracks and cavities in concrete. Can also be used for the injection sealing of construction joints through SikaFuko injection hoses.

# SIKA – THE GLOBAL LEADER IN STRUCTURAL WATERPROOFING

SIKA PROVIDES A WIDE RANGE of alternative waterproofing solutions for different requirements in new basement construction and refurbishment. With more than 100 years of experience in Structural Waterproofing, Sika is the reliable partner for all of the parties involved on every project. Innovative Sika waterproofing solutions that include both rigid and flexible waterproofing systems, create Added Value for our customers every day, and are a key driver of our global success and one of the key reasons why Sika is the clear number 1 in Structural Waterproofing. With a local presence all around the world, now in more than in 80 countries, Sika is ideally positioned to support our customers everywhere – right from the initial project design and detailing, through to successful installation and completion on site.

#### **DESIGN SUPPORT**



- Selection of appropriate concept and system solutions
- Concrete mix design and control
- Engineering details, custom solutions
- Cost/Performance/Life cycle analysis

#### SPECIFICATION SUPPORT



- Specifications, Method Statements and Bills of Quantities
- Detail drawings including CAD
- Watertight guarantee concepts

#### SITE SUPPORT




- Concrete laboratories (incl. mobile units)
- Application training on site
- Troubleshooting
- Quality Control procedures

#### MAINTENANCE SUPPORT



- Maintenance Manuals
- Refurbishment systems
- Repair and refurbishment documentation
- Site Inspection and refurbishment proposals

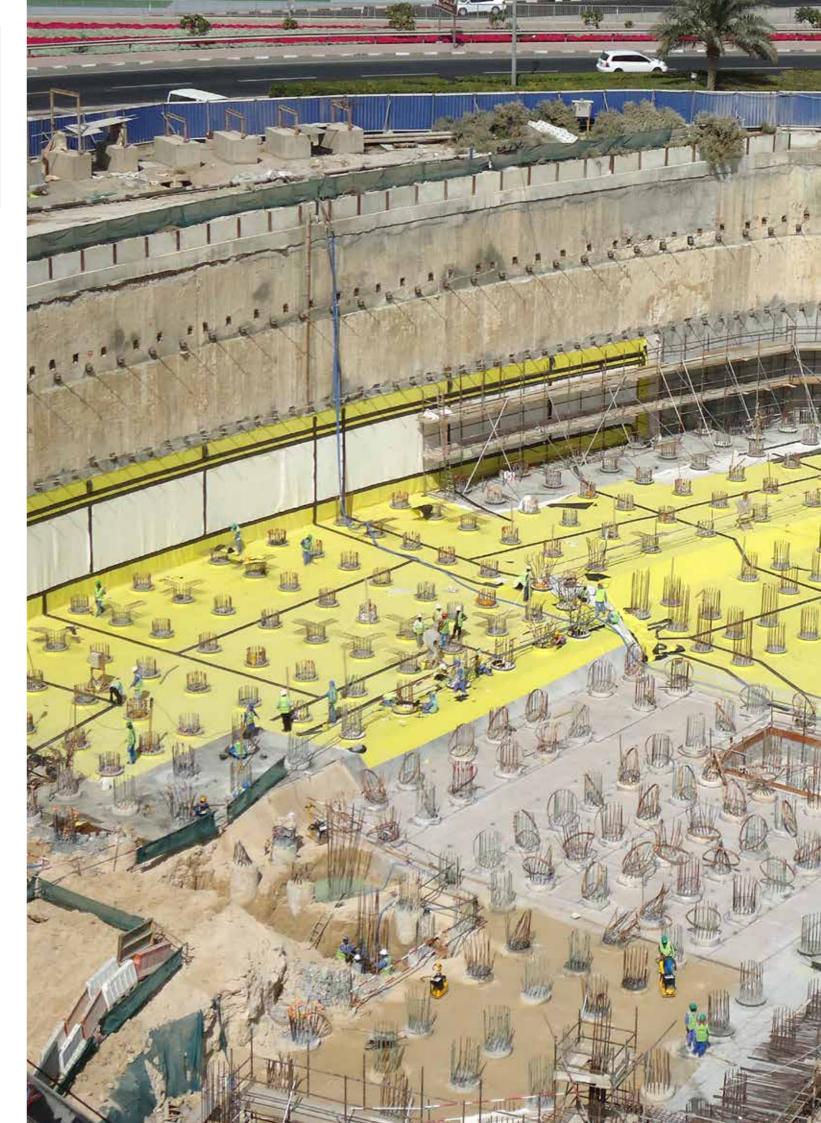

### GLOBAL BUT LOCAL PARTNERSHIP



## FOR MORE WATERPROOFING **INFORMATION:**



#### WHO WE ARE

Sika AG, Switzerland, is a globally active specialty chemicals company. Sika supplies the building and construction industry as well as manufacturing industries (automotive, bus, truck, rail, solar and wind power plants, façades). Sika is a leader in processing materials used in sealing, bonding, damping, reinforcing and protecting loadbearing structures. Sika's product lines feature highquality concrete admixtures, specialty mortars, sealants and adhesives, damping and reinforcing materials, structural strengthening systems, industrial flooring as well as roofing and waterproofing systems.

Our most current General Sales Conditions shall apply. lease consult the Data Sheet prior to any use and processing.









**SIKA SERVICES AG** 

Tüffenwies 16 CH-8048 Zürich Switzerland

#### Contact

Phone +41 58 436 40 40 +41 58 436 41 50

www.sika.com

